

# LT

# LT20A SERIES


Compact, lightweight,  
and easy-to-mount counter



## Digital Indicators

- Compact design : DIN standard size (72 mm x 72 mm / 2.83" x 2.83" W x H).
- Suitable for panel mounting
- Selectable display resolutions: 0.5/ 1/ 5/ 10 μm
- BCD and RS-232C I/ O models to choose from.
- Reset/preset
- Peak hold function for measuring max./ min./ peak-to-peak values and GO/NO GO evaluation.
- ADD/ SUB function (2-axis model only)
- Data storage : resolution, counting direction, comparator reference points, preset value, mode, BCD sign (B type), communication parameters (C type)
- Inch/ metric display
- Applications: automatic sorting and measuring of parts on production lines.

### Dimensions

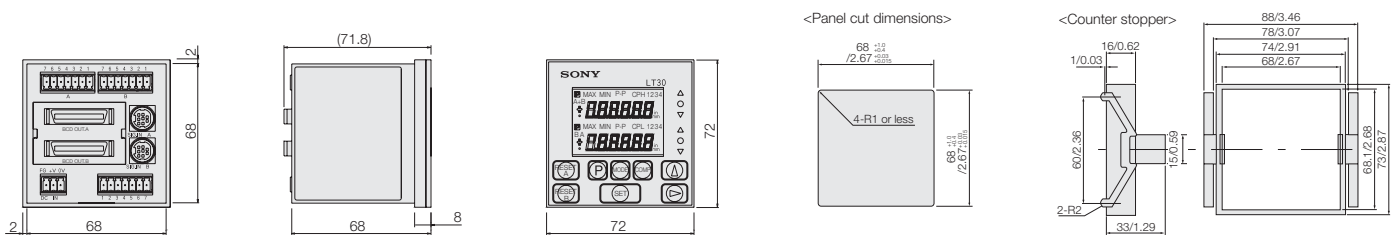

Unit : mm/inch

### Common Specifications

Model	LT20A-101	101B	101C	201	201B	201C
Display	6 digit backlit LCD, mode display					
I/O	Measuring unit input	1 channel			2 channel	
	I/O connectors *1				○	
	BCD *2	—	○	—	—	○
	RS-232C *3	—	—	○	—	○
RS-TRG *4	—	—	○	—	—	○
Reset function	Reset key or external input (I/O connectors)					
	—	—	RS-232C command	—	—	RS-232C command
Preset function	Preset value set with preset key, recalled with reset key.					
	—	—	Set or recalled with RS-232C command	—	—	Set or recalled with RS-232C command
Comparator function	Three-level comparator Comparator value set with keys on the front panel. Result evaluation: LED and I/O connector output (photocoupler)					
	—	Up to 4 values can be set for comparator (key input). Switched with BCD terminal.	Set with RS-232C command	—	Up to 4 values can be set for comparator (key input). Switched with BCD terminal.	Set with RS-232C command
Peak hold function	Maximum, minimum, and peak-to-peak values. Measuring started by the start input of the I/O connector; update stop by pause input.					
	—	—	RS-232C can set or start.	—	—	RS-232C can set or start.
Input resolution	0.0005 mm, 0.001 mm, 0.005 mm, 0.01 mm selectable					
Display resolution	0.0005 mm, 0.001 mm, 0.005 mm, 0.01 mm (0.00002", 0.00005", 0.0002", 0.0005") selectable					
Direction	Can be switched					
Reference point function	Function use enabled/disabled can be selected (if use is enabled, the unit enters reference point signal input wait status at the same time as power-on).					
Maximum response speed	20 MHz (A/B phase difference)					
Addition and subtraction function	—			A+B, A-B, B-A can be set with the direction setting.		
Alarm	Displayed on LCD or the I/O connector's comparator outputs are all "H" (OFF).					
	—	BCD alarm terminal "H" (OFF)	—	—	BCD alarm terminal "H" (OFF)	—
Data storage	Resolution, direction, comparator value, preset value, modes, etc.					
	—	BCD sign	Data signalling rate, etc.	—	BCD sign	Data signalling rate, etc.
Temperature	Operating temperature: 0 to 40°C Storage temperature: -10 to 50°C					
Power consumption *5	4 W	5 W	4 W	6 W	8 W	6 W
Mass	Approx. 200 g	Approx. 230 g	Approx. 220 g	Approx. 210 g	Approx. 270 g	Approx. 230 g
Power voltage	Power input connector (3 pins) : DC9.0 to 26.4 V.					
Compatible measuring unit	DG, DL series					

Note 1 : I/O connector

Input : Reset, peak-hold start, peak-hold pause, RS trigger (RS-232C models only)

Output : Result evaluation (photocoupler)

Note 3 : RS-232C (8 pin mini-DIN connector)

Reset, preset value setting/recall, peak-hold start, peak-hold pause, current value hold, software version read, comparator value setting, current value/maximum value/minimum value/peak-to-peak measuring mode selection and output, key lock and release.

Note 2 : BCD (36 pin half-pitch connector)

Input : Reset, peak-hold start, comparator value selection (4 settings)

Output : five digits (open collector) One of current value/maximum value/minimum value/peak-to-peak value selected and output.

Alarm output

Note 4 : RS-TRG pin

Trigger input for RS-232C data output

Note 5 : With measuring unit connected.