

GB-ER SERIES (SR138R)

The GB-ER series combines Sony's original Magnescale technology and legendary durability with a built-in reference point.


- Excellent durability against workshop conditions resistant to oil, dirt, shock and vibration.
- Compact design for a space-saving installation.
- Accuracy: (5+5L/1000)μm
- Resolution: 0.5μm
- Simple structure should be conducive to long life.




Dimensions

SR138R (Model name of the scale itself)

CH04 (Name of accessory cable model)

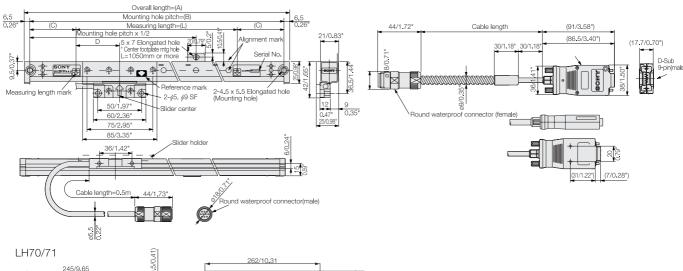

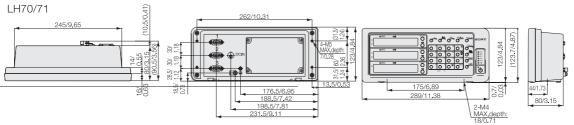

Unit : mm/inch

Specifications		
Model		GB-ER
Measuring length		50/100/150/200/250/300/350/400/450/500/550/600/650/750/850/950/1050/1250/1400/1600/1850/2050/2200 mm
Scale length	Overall length	ML + 104mm (50 to 200mm) ML + 120mm (250 to 2200mm)
	Max.travel	ML + 14mm (50 to 200mm) ML + 30mm (250 to 2200mm)
	With or without Centerfootplate	Without (50 to 950mm) With (1050 to 2200mm)
Accuracy at 20°C		(5 + 5L / 1000) μm
Reference point		Standard:Center point, User-selected point (A/B quadrature)
Mounting parallelism		±0.1mm
Expansion coefficient		(11±1) x 10 ⁻⁶ /C
Operating temperature		0 to 40°C
Storage temperature		-20 to 50°C
Cable length		3m
Protective design grade		Scale:IP65 Interface unit:IP30
Input/Output	Output signal	A/B/Z quadrature
signal	Power supply	DC + 5V ± 5%
	Connector	D-sub 9 pin
Resolution		0.5 µm
Response speed	Scale signal	60m/min
	Reference signal	60m/min
Power consumption		Max. 200mA

 $^{^{\}star}\,\mathrm{Specifications}$ and appearance are subject to should be change with prior notice.